



**Minimalistic and Elegant  
0.5~2m Height Application  
LED Wall Washer Light**

WWL2924




RAL7012 RAL9006 RAL9003

**Features**



- Minimalistic appearance design
- Cost-effective product
- High-strength aviation aluminum housing.
- Highly reliable and impact-resistant toughened glass.
- Optical dark-free zone design for seamless splicing of light.
- Multiple options of visually comfortable and precise optical lens.
- International standard DMX512 protocol.



**Light Distribution Curve**




| H (m) | E (lx) | D (m)          |                 |
|-------|--------|----------------|-----------------|
|       |        | C <sub>0</sub> | C <sub>90</sub> |
|       |        | 40°            | 20°             |
| 1     | 4146   | 0.73           | 0.35            |
| 2     | 1037   | 1.46           | 0.71            |
| 3     | 461    | 2.18           | 1.06            |
| 4     | 259    | 2.96           | 1.41            |
| 5     | 166    | 3.64           | 1.76            |



| H (m) | E (lx) | D (m) |
|-------|--------|-------|
|       |        | 30°   |
| 1     | 3883   | 0.54  |
| 2     | 971    | 1.61  |
| 3     | 431    | 2.14  |
| 4     | 243    | 2.68  |
| 5     | 155    | 3.22  |



**Dimensions**

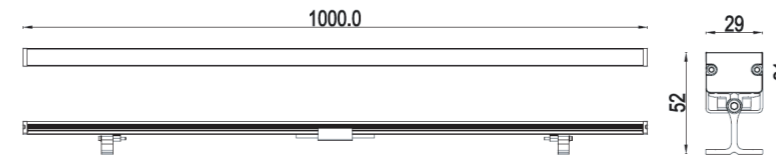

**Specifications**

|                       |                                     |     |          |
|-----------------------|-------------------------------------|-----|----------|
| Power Consumption     | 24W                                 | 12W | 15W      |
| Luminous Flux         | 1920 lm @4000K                      |     |          |
| Color Temperature     | 2700K/3000K/4000K/5000K/5700K/6500K |     | RGB RGBW |
| Beam Angle (50%Imax)  | 17° /23° /33° /46° /20*40° /25*80°  |     |          |
| LED Brand             | CREE / NICHIA / OSRAM / LUMILEDS    |     |          |
| Input Voltage         | DC24V                               |     |          |
| Protection Class IEC  | III                                 |     |          |
| Control               | DMX / ON-OFF                        | DMX | DMX      |
| Finish                | Powder coating/Anodizing            |     |          |
| Housing               | Extruded aluminum 6063              |     |          |
| Cover                 | Toughened glass                     |     |          |
| IP Rating             | IP66                                |     |          |
| IK Rating             | IK06                                |     |          |
| Mounting              | Adjustable bracket                  |     |          |
| Operating Temperature | -35° C ~ 60° C(-22° F ~ 122° F)     |     |          |
| Storage Temperature   | -40° C ~ 70° C(-40° F ~ 158° F)     |     |          |
| Lifespan              | >50,000Hrs(Ta=35° C@L70)            |     |          |
| Certificate           | CE / RoHS / EMC                     |     |          |



**Minimalistic and Portable  
2~4m Height Application  
LED Wall Washer Light**


WWL3736

**Features**



- Minimalistic appearance design
- Cost-effective product
- High-strength aviation aluminum housing.
- Highly reliable and impact-resistant toughened glass.
- Optical dark-free zone design for seamless splicing of light.
- Multiple options of visually comfortable and precise optical lens.
- International standard DMX512 protocol.




**Light Distribution Curve**




| H (m) | E (lx) | D (m) |      |
|-------|--------|-------|------|
|       |        | C0    | C90  |
|       |        | 20°   | 12°  |
| 1     | 17572  | 0.35  | 0.21 |
| 2     | 4393   | 0.71  | 0.42 |
| 3     | 1952   | 1.06  | 0.63 |
| 4     | 1098   | 1.41  | 0.84 |
| 5     | 703    | 1.76  | 1.05 |



| H (m) | E (lx) | D (m) |      |
|-------|--------|-------|------|
|       |        | C0    | C90  |
|       |        | 45°   | 12°  |
| 1     | 10468  | 0.83  | 0.21 |
| 2     | 2617   | 1.66  | 0.42 |
| 3     | 1163   | 2.49  | 0.63 |
| 4     | 654    | 3.31  | 0.84 |
| 5     | 419    | 4.14  | 1.05 |




**Dimensions**

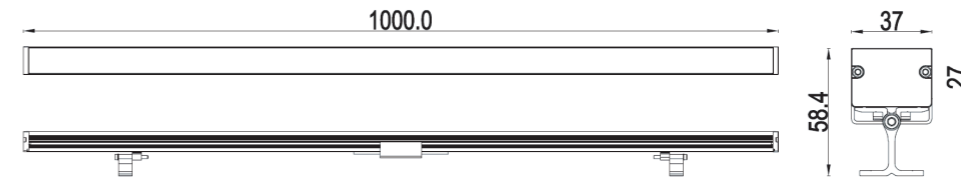

**Specifications**

|                       |  |     |      |
|-----------------------|--|-----|------|
| Power Consumption     | 36W  | 36W | 36W  |
| Luminous Flux         | 2700 lm @4000K                                   |     |      |
| Color Temperature     | 2700K/3000K/4000K/5000K/5700K/6500K              | RGB | RGBW |
| Beam Angle (50%Imax)  | 8° /12° /17° /30° /45° /60° /80° /12*20° /12*45° |     |      |
| LED Brand             | CREE / NICHIA / OSRAM / LUMILEDS                 |     |      |
| Input Voltage         | DC24V  |     |      |
| Protection Class IEC  | III  |     |      |
| Control               | DMX / ON-OFF                                     | DMX | DMX  |
| Finish                | Powder coating/Anodizing                         |     |      |
| Housing               | Extruded aluminum 6063                           |     |      |
| Cover                 | Toughened glass                                  |     |      |
| IP Rating             | IP66   |     |      |
| IK Rating             | IK06   |     |      |
| Mounting              | Adjustable bracket                               |     |      |
| Operating Temperature | -35° C ~ 60° C (-22° F ~ 122° F)                 |     |      |
| Storage Temperature   | -40° C ~ 70° C (-40° F ~ 158° F)                 |     |      |
| Lifespan              | >50,000Hrs(Ta=35° C@L70)                         |     |      |
| Certificate           | CE / RoHS / EMC                                  |     |      |

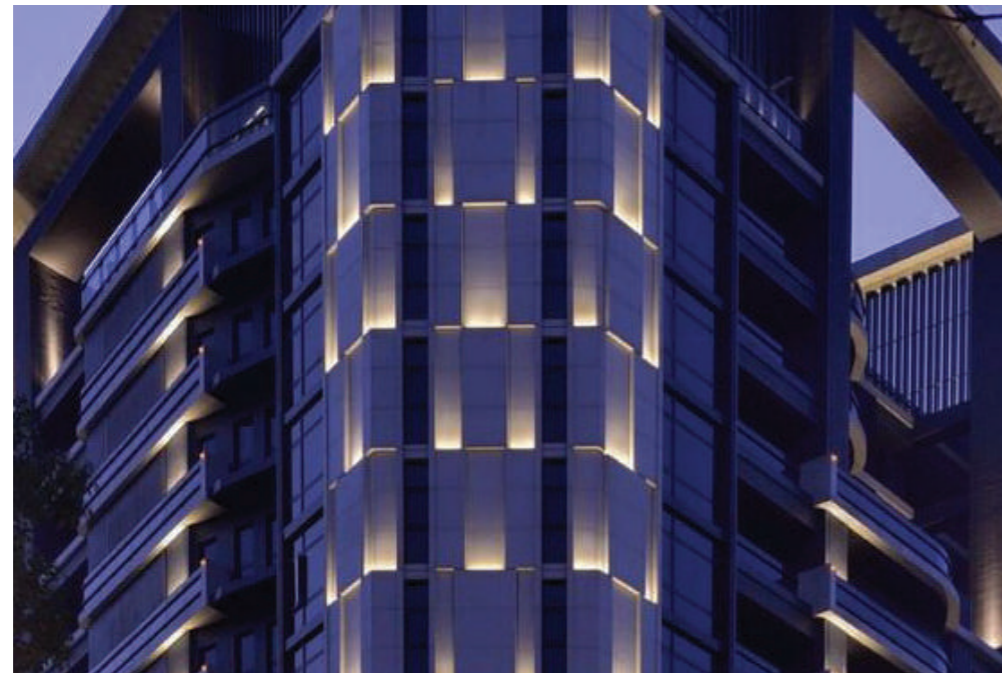



**Minimalistic and Elegant  
0.5~2m Height Application  
LED Wall Washer Light**

WWL2824

**Features**


- Minimalistic appearance design
- Thermoelectric separation integrated structure design.
- High-strength aviation aluminum housing.
- Highly reliable and impact-resistant toughened glass.
- Optical dark-free zone design for seamless splicing of light.
- Multiple options of visually comfortable and precise optical lens.
- International standard DMX512 protocol.





RAL7012 RAL9006 RAL9003




**Light Distribution Curve**




| H (m) | E (lx) | D (m) |      |
|-------|--------|-------|------|
|       |        | C0    | C90  |
|       |        | 80°   | 25°  |
| 1     | 2208   | 1.68  | 0.44 |
| 2     | 552    | 3.36  | 0.89 |
| 3     | 245    | 5.03  | 1.33 |
| 4     | 138    | 6.71  | 1.77 |
| 5     | 88     | 8.39  | 2.22 |



| H (m) | E (lx) | D (m) |     |
|-------|--------|-------|-----|
|       |        | C0    | C90 |
|       |        | 30°   |     |
| 1     | 3624   | 0.54  |     |
| 2     | 906    | 1.61  |     |
| 3     | 403    | 2.14  |     |
| 4     | 226    | 2.68  |     |
| 5     | 145    | 3.22  |     |



**Dimensions**

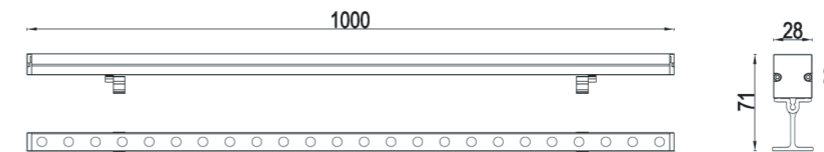

**Specifications**

|                       |                                     |     |      |
|-----------------------|-------------------------------------|-----|------|
| Power Consumption     | 24W                                 | 24W | 24W  |
| Luminous Flux         | 1920 lm @4000K                      |     |      |
| Color Temperature     | 2700K/3000K/4000K/5000K/5700K/6500K | RGB | RGBW |
| Beam Angle (50%Imax)  | 17° /23° /33° /46° /20*40° /25*80°  |     |      |
| LED Brand             | CREE / NICHIA / OSRAM / LUMILEDS    |     |      |
| Input Voltage         | DC24V                               |     |      |
| Protection Class IEC  | III                                 |     |      |
| Control               | DMX / ON-OFF                        | DMX | DMX  |
| Finish                | Powder coating                      |     |      |
| Housing               | Extruded aluminum 6063              |     |      |
| Cover                 | Toughened glass                     |     |      |
| IP Rating             | IP66                                |     |      |
| IK Rating             | IK06                                |     |      |
| Mounting              | Adjustable bracket                  |     |      |
| Operating Temperature | -35° C ~ 60° C (-31° F ~ 140° F)    |     |      |
| Storage Temperature   | -40° C ~ 70° C (-40° F ~ 158° F)    |     |      |
| Lifespan              | >50,000Hrs(Ta=35° C@L70)            |     |      |
| Certificate           | CE / RoHS / EMC                     |     |      |



**Minimalistic and Artistic  
2~4m Height Application  
LED Wall Washer Light**

WWL4336




**Features**



- Minimalistic appearance design
- High-precision vents for greater performance, increased durability, and higher reliability.
- High-strength aviation aluminum housing.
- Highly reliable and impact-resistant toughened glass.
- Optical dark-free zone design for seamless splicing of light.
- Multiple options of visually comfortable and precise optical lens.
- International standard DMX512 protocol.




**Light Distribution Curve**




| H (m) | E (lx) | D (m) |
|-------|--------|-------|
|       |        | 12°   |
| 1     | 27905  | 0.21  |
| 2     | 6976   | 0.42  |
| 3     | 3101   | 0.63  |
| 4     | 1744   | 0.84  |
| 5     | 1116   | 1.05  |



| H (m) | E (lx) | D (m) | C0   | C90 |
|-------|--------|-------|------|-----|
|       |        | 45°   | 12°  |     |
| 1     | 10290  | 0.83  | 0.21 |     |
| 2     | 2573   | 1.66  | 0.42 |     |
| 3     | 1143   | 2.49  | 0.63 |     |
| 4     | 643    | 3.31  | 0.84 |     |
| 5     | 412    | 4.14  | 1.05 |     |



**Dimensions**

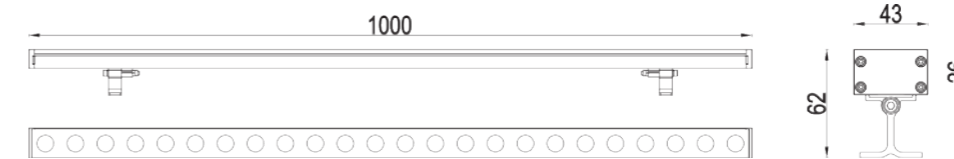

**Specifications**

|                       |   |     |      |
|-----------------------|---|-----|------|
| Power Consumption     | 36W   | 36W | 36W  |
| Luminous Flux         | 2700 lm @4000K                              |     |      |
| Color Temperature     | 2700K/3000K/4000K/5000K/5700K/6500K         | RGB | RGBW |
| Beam Angle (50%Imax)  | 8° /12° /30° /45° /60° /80° /12*20° /12*45° |     |      |
| LED Brand             | CREE / NICHIA / OSRAM / LUMILEDS            |     |      |
| Input Voltage         | DC24V / AC220V                              |     |      |
| Protection Class IEC  | III/I                                       |     |      |
| Control               | DMX / ON-OFF                                | DMX | DMX  |
| Finish                | Powder coating                              |     |      |
| Housing               | Extruded aluminum 6063                      |     |      |
| Cover                 | Toughened glass                             |     |      |
| IP Rating             | IP66  |     |      |
| IK Rating             | IK06  |     |      |
| Mounting              | Adjustable bracket                          |     |      |
| Operating Temperature | -35° C ~ 60° C (-31° F ~ 140° F)            |     |      |
| Storage Temperature   | -40° C ~ 70° C (-40° F ~ 158° F)            |     |      |
| Lifespan              | >50,000Hrs(Ta=35° C@L70)                    |     |      |
| Certificate           | CE / RoHS / EMC                             |     |      |



**Minimalistic and Low-glare  
3~6m Height Application  
LED Wall Washer Light**

WWL5048




RAL7012 RAL9006 RAL9003



**Features**

- Minimalistic appearance design
- High-precision vents for greater performance, increased durability, and higher reliability.
- High-strength aviation aluminum housing.
- Highly reliable and impact-resistant toughened glass.
- Optical dark-free zone design for seamless splicing of light.
- Multiple options of visually comfortable and precise optical lens.
- International standard DMX512 protocol.


**Light Distribution Curve**




| H (m) | E (lx) | D (m) |      |
|-------|--------|-------|------|
|       |        | C0    | C90  |
|       |        | 20°   | 12°  |
| 1     | 23872  | 0.35  | 0.21 |
| 2     | 5968   | 0.71  | 0.42 |
| 3     | 2652   | 1.06  | 0.63 |
| 4     | 1492   | 1.41  | 0.84 |
| 5     | 955    | 1.76  | 1.05 |



| H (m) | E (lx) | D (m) |  |
|-------|--------|-------|--|
|       |        | 30°   |  |
| 1     | 10414  | 0.54  |  |
| 2     | 2604   | 1.07  |  |
| 3     | 1157   | 1.61  |  |
| 4     | 651    | 2.14  |  |
| 5     | 417    | 2.68  |  |



**Dimensions**

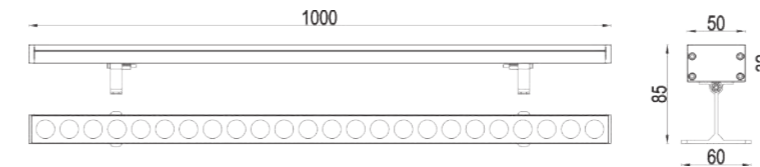

**Specifications**

|                       |  |     |      |
|-----------------------|--|-----|------|
| Power Consumption     | 48W  | 48W | 48W  |
| Luminous Flux         | 3840 lm @4000K                               |     |      |
| Color Temperature     | 2700K/3000K/4000K/5000K/5700K/6500K          | RGB | RGBW |
| Beam Angle (50%Imax)  | 10° /15° /30° /45° /60° /80° /12*20° /12*45° |     |      |
| LED Brand             | CREE / NICHIA / OSRAM / LUMILEDS             |     |      |
| Input Voltage         | DC24V / AC220V                               |     |      |
| Protection Class IEC  | III/I  |     |      |
| Control               | DMX / ON-OFF                                 | DMX | DMX  |
| Finish                | Powder coating                               |     |      |
| Housing               | Extruded aluminum 6063                       |     |      |
| Cover                 | Toughened glass                              |     |      |
| IP Rating             | IP66   |     |      |
| IK Rating             | IK06   |     |      |
| Mounting              | Adjustable bracket                           |     |      |
| Operating Temperature | -35° C ~ 60° C (-31° F ~ 140° F)             |     |      |
| Storage Temperature   | -40° C ~ 70° C (-40° F ~ 158° F)             |     |      |
| Lifespan              | >50,000Hrs(Ta=35° C@L70)                     |     |      |
| Certificate           | CE / RoHS / EMC                              |     |      |





## Minimalistic and Low-glare 5~8m Height Application LED Wall Washer Light

WWL6072

### Features


- Minimalistic appearance design
- High-precision vents for greater performance, increased durability, and higher reliability.
- High-strength aviation aluminum housing.
- Highly reliable and impact-resistant toughened glass.
- Humanized anti-glare optical design.
- Multiple options of visually comfortable and precise optical lens.
- International standard DMX512 protocol.





RAL7012 RAL9006 RAL9003




### Light Distribution Curve




| H (m) | E (lx) | D (m) |
|-------|--------|-------|
|       |        | 17°   |
| 1     | 28569  | 0.30  |
| 2     | 7142   | 0.60  |
| 3     | 3174   | 0.90  |
| 4     | 1786   | 1.20  |
| 5     | 1143   | 1.49  |



| H (m) | E (lx) | D (m) |
|-------|--------|-------|
|       |        | 40°   |
| 1     | 8489   | 0.73  |
| 2     | 2122   | 1.46  |
| 3     | 943    | 2.18  |
| 4     | 531    | 2.91  |
| 5     | 340    | 3.64  |



### Dimensions

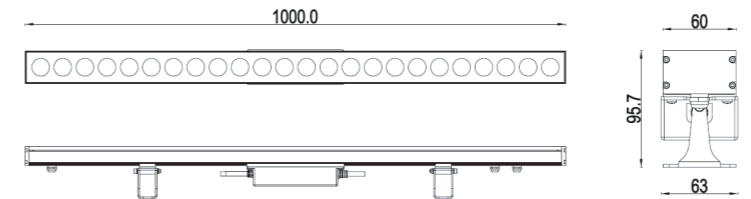

### Specifications

|                       |  |     |      |
|-----------------------|--|-----|------|
| Power Consumption     | 72W  | 72W | 72W  |
| Luminous Flux         | 5184 lm @4000K                             |     |      |
| Color Temperature     | 2700K/3000K/4000K/5000K/5700K/6500K        | RGB | RGBW |
| Beam Angle (50%Imax)  | 4.5° /10° /15° /30° /45° /60° /80° /12*45° |     |      |
| LED Brand             | CREE / NICHIA / OSRAM / LUMILEDS           |     |      |
| Input Voltage         | DC24V / AC220V                             |     |      |
| Protection Class IEC  | III/I                                      |     |      |
| Control               | DMX / ON-OFF                               | DMX | DMX  |
| Finish                | Powder coating                             |     |      |
| Housing               | Extruded aluminum 6063                     |     |      |
| Cover                 | Toughened glass                            |     |      |
| IP Rating             | IP66                                       |     |      |
| IK Rating             | IK06                                       |     |      |
| Mounting              | Adjustable bracket                         |     |      |
| Operating Temperature | -35° C ~ 60° C (-31° F ~ 140° F)           |     |      |
| Storage Temperature   | -40° C ~ 70° C (-40° F ~ 158° F)           |     |      |
| Lifespan              | >50,000Hrs(Ta=35° C@L70)                   |     |      |
| Certificate           | CE / RoHS / EMC                            |     |      |